



由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

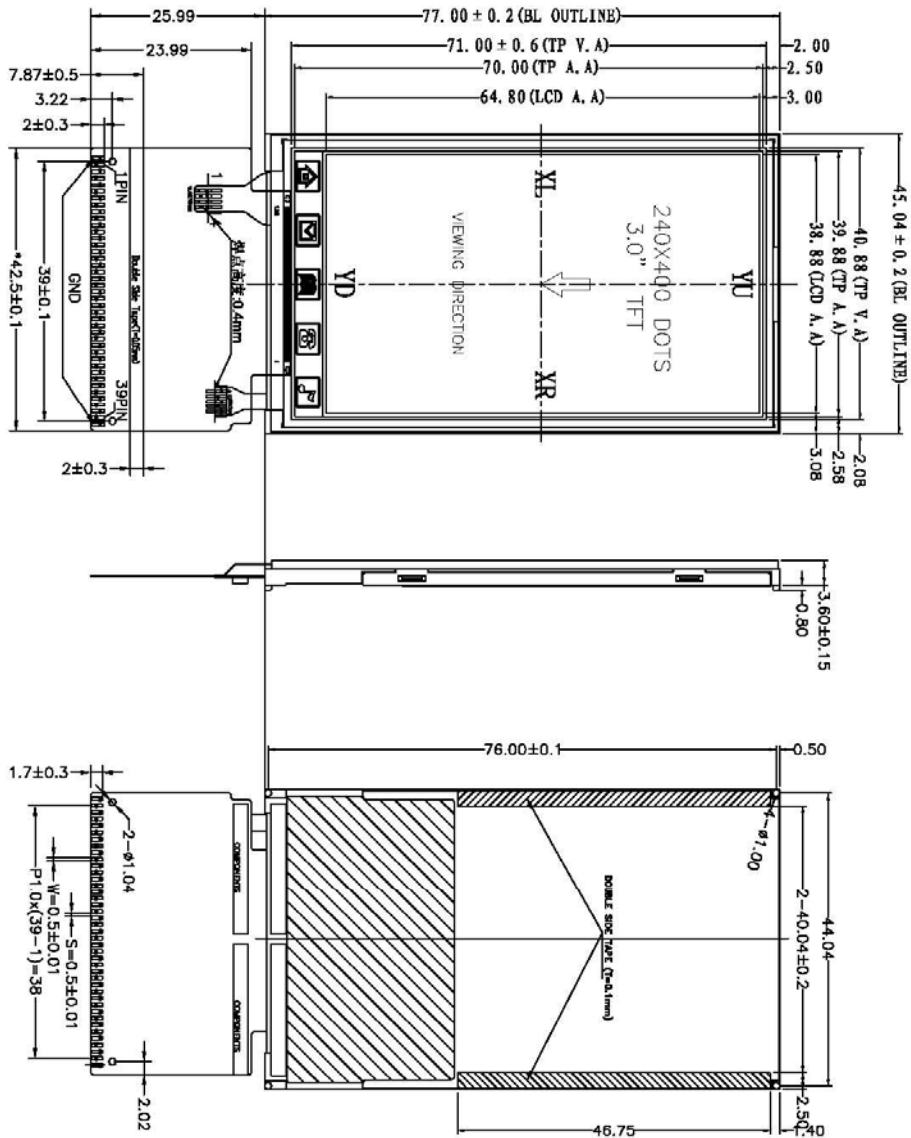

- NOTES:
1. DISPLAY TYPE: 3.0° (16:9) TFT, Transmissive
  2. OPERATING TEMP: -20° C ~ 70° C
  3. STORAGE TEMP: -30° C ~ 80° C
  4. MAIN LCD DRIVER: R61509V
  5. BACKLIGHT: 4 CHIP-WHITE LED
  6. GENERAL TOLERANCE: ±0.2



1	GND
2	YD
3	XL
4	YU
5	XR
6	LCD_ID
7	VCC
8	OVCC
9	FMARK
10	CS
11	RS
12	WR
13	RD
14	DB0
15	DB1
16	DB2
17	DB3
18	DB4
19	DB5
20	DB6
21	DB7
22	DB8
23	DB9
24	DB10
25	DB11
26	DB12
27	DB13
28	DB14
29	DB15
30	RESET
31	1M0
32	NC
33	GND
34	LED-1
35	LED-2
36	LED-3
37	LED-4
38	LED-A
39	GND

由 Autodesk 教育版产品制作

客户确认签名:

由 Autodesk 教育版产品制作

深圳市耀宇科技有限公司  
SHENZHEN YAO YU TECHNOLOGY CO., LTD

出图编号: YM300T-006AT 090602  
产品编号: YM300T-006AT  
设计: 周祥云/090602  
客户编号:

单位	mm
版本	A
公差	±0.2
	±0.5°
页数	1/1
比例	1:1
视角	