



FPC INTERFACE

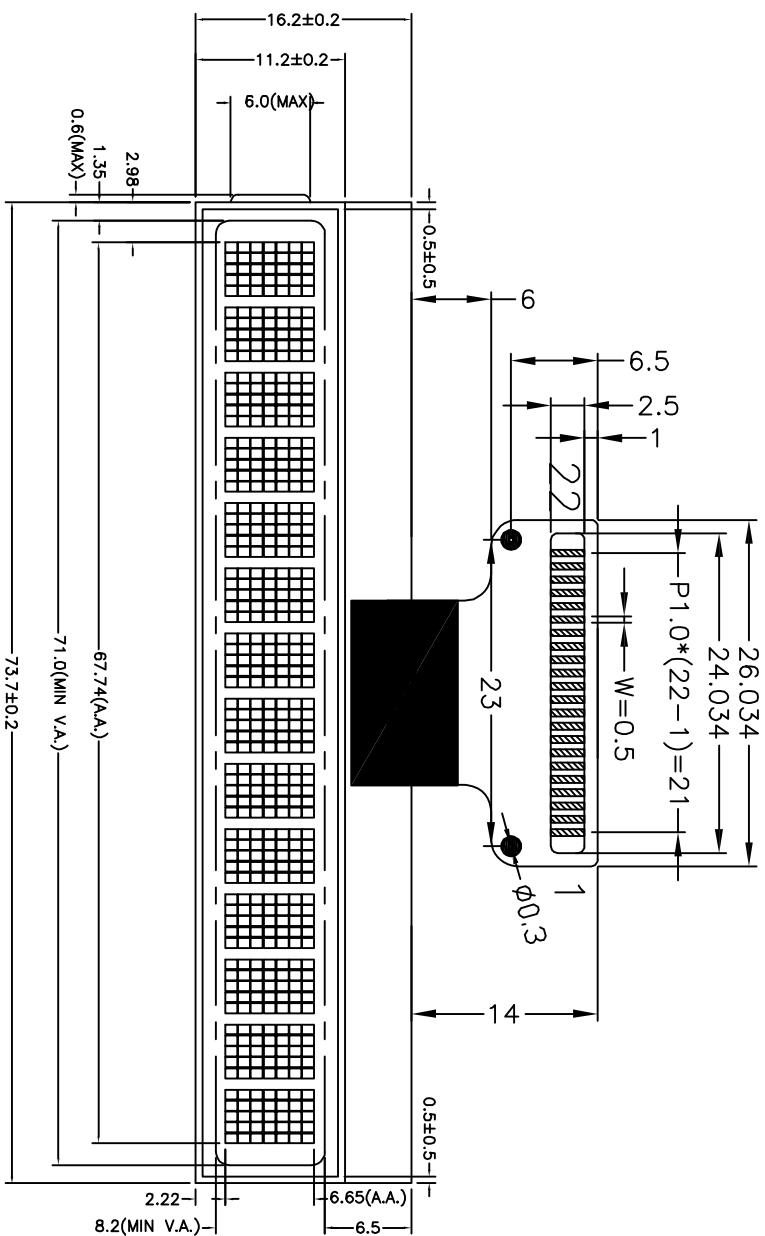

1	RST
2	RS
3	CS
4	RW
5	E
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6
13	DB7
14	VSS
15	VDD
16	VOUT
17	PSB
18	PS12B
19	CAP1P
20	CAP1N
21	VOUT
22	V0

NOTES:

1. DISPLAY TYPE: STN/GRAY/POSITIVE
2. OPERATING VOLTAGE: 5.0V
3. OPERATING TEMPERATURE: 0°C~50°C
4. STORAGE TEMPERATURE: -10°C~60°C
5. DRIVE MODE: 1/16D,1/5B
6. VIEWING DIRECTION: 12:00
7. POLARIZER TYPE: TRANSMISSIVE
8. CONNECTOR: COG/ST7032I(V1.2)
9. CUSTOMER No.:

		深 圳 市 耀 宇 科 技 有 限 公 司 SHENZHEN YAO YU TECHNOLOGY CO., LTD	
DRAW NO.	YMSG-C1401AUGTNNN	DRAWN	ME CHECKED/EE CHECKED
UNIT:mm	PAGE:1/1 VER. A SCALE:1/1	2010-05-08	APPROVED
TOLERANCE UNLESS:±0.2			